

08/17/99  
JCS32 U.S. PTO

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (4/98)  
Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. B-1484  
First Inventor or Application Identifier Yong Wang, et al.  
Title Catalyst Structure and Method of Fischer..  
Express Mail Label No. EJ017935634US

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

1. ☒ \* Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original and a duplicate for fee processing) 15
2. ☒ Specification [Total Pages 15]  
(preferred arrangement set forth below)  
- Descriptive title of the Invention  
- Cross References to Related Applications  
- Statement Regarding Fed sponsored R & D  
- Reference to Microfiche Appendix  
- Background of the Invention  
- Brief Summary of the Invention  
- Brief Description of the Drawings (if filed)  
- Detailed Description  
- Claim(s)  
- Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 2]  
1
4. Oath or Declaration [Total Pages 1]  
a. ☐ Newly executed (original or copy)  
b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))  
(for continuation/divisional with Box 16 completed)  
i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting  
inventor(s) named in the prior application,  
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)  
a. ☐ Computer Readable Copy  
b. ☐ Paper Copy (identical to computer copy)  
c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure ☐ Copies of IDS  
Statement (IDS)/PTO-1449 Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
13. ☒ \* Small Entity ☐ Statement filed in prior application,  
Statement(s) Status still proper and desired  
(PTO/SB/09-12)
14. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
15. ☐ Other: .....

\* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.29).

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: \_\_\_\_\_

Prior application information: Examiner \_\_\_\_\_ Group / Art Unit: \_\_\_\_\_

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

## 17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☒ Correspondence address below

Name Paul W. Zimmerman (K1-53)  
Battelle Memorial Institute

Address P.O. Box 999

City Richland State WA Zip Code 99352

Country U.S.A. Telephone (509) 375-2981 Fax (509) 375-4487

Name (Print/Type) Paul W. Zimmerman Registration No. (Attorney/Agent) 34,761

Signature Paul W. Zimmerman Date 9/9/AUG/17

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

PATENT

File No. B-1484

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant or Patentee: Yong Wang, David P. Vanderwiel, Anna Lee Y. Tonkovich,  
Yufei Gao, and Eddie G. Baker

Serial or Patent No.: \_\_\_\_\_

Filed or Issued: \_\_\_\_\_

For: CATALYST STRUCTURE AND METHOD OF FISCHER-TROPSCH SYNTHESIS

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS  
(37 CFR 1.9(f) and 1.27(d)) - NONPROFIT ORGANIZATION

I hereby declare that I am an official empowered to act on behalf of the  
nonprofit organization identified below:

NAME OF ORGANIZATION Battelle Memorial Institute

Pacific Northwest Division

ADDRESS OF ORGANIZATION Post Office Box 999, Richland, WA 99352

TYPE OF ORGANIZATION:

- ☒ Nonprofit Scientific or Educational Under Statute of State of the  
United States of America  
(Name of State Ohio)  
(Citation of Statute Sections 1719.01 and 1719.05, Rev. Code  
of Ohio)

I hereby declare that the nonprofit organization identified above qualifies as  
a nonprofit organization as defined in 37 CFR 1.9(e) for purposes of paying  
reduced fees under section 41(a) and (b) of Title 35, United States Code with  
regard to the invention entitled CATALYST STRUCTURE AND METHOD OF FISCHER-  
TROPSCH SYNTHESIS by inventor(s) Yong Wang, David P. Vanderwiel, Anna Lee Y.  
Tonkovich, Yufei Gao, and Eddie G. Baker, described in

- ☐ application executed \_\_\_\_\_  
☒ specification filed herewith  
☐ application serial no. \_\_\_\_\_, filed \_\_\_\_\_  
☐ patent no. \_\_\_\_\_, issued \_\_\_\_\_.

I hereby declare that rights under contract or law have been conveyed to and remain with the nonprofit organization with regard to the above identified invention.

If the rights held by the nonprofit organization are not exclusive, each individual, concern or organization having rights to the invention is listed below\* and no rights to the invention are held by any person, other than the inventor, who could not qualify as small business concern under 37 CFR 1.9(d) or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

\*NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

NAME NONE  
ADDRESS \_\_\_\_\_  
☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

NAME \_\_\_\_\_  
ADDRESS \_\_\_\_\_  
☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING Paul W. Zimmerman  
TITLE OF ORGANIZATION Contracting Officer, Pacific Northwest Division,  
Battelle Memorial Institute  
ADDRESS OF PERSON SIGNING Post Office Box 999, Richland, WA 99352

SIGNATURE Paul W. Zimmerman DATE 29/AUG/77

EXPRESS MAIL MAILING LABEL #EJ017935634US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Y Wang, DP Vanderwiel, AY Tonkovich,  
Y Gao, and EG Baker

For: CATALYST STRUCTURE AND METHOD  
OF FISCHER-TROPSCH SYNTHESIS

Our Ref. No: B-1484

Date: August 17, 1999

CERTIFICATE OF MAILING

Box PATENT APPLICATION  
Assistant Commissioner for Patents  
Washington, DC 20231

Dear Sir:


The undersigned hereby certifies that the attached:

- ☒ Patent Application of 15 pages
- ☒ 2 Sheets of Drawings
- ☒ Patent Transmittal Fee Sheet (2 ea.)
- ☐ Assignment and Cover Sheet
- ☐ Combined Declaration and Power of Attorney
- ☒ Small Entity
- ☐ Information Disclosure Statement
- ☐ with attachments

are being deposited with the United States Postal Service as:

- ☐ First Class Mail
- ☒ Express Mail - Label #EJ017935634US

in an envelope addressed to the Assistant Commissioner for Patents,  
Washington, D.C. 20231, on the date set forth below.

  
Signature

8/17/1999  
Date Deposited

Janice K. Laybourn (K1-53)  
Intellectual Property Services  
Battelle Memorial Institute  
Pacific Northwest Division  
P.O. Box 999  
Richland, WA 99352  
(509) 375-2655

## 5

## 10

## 15

25

conventional reactors are not improved even with more active Fischer-Tropsch synthesis catalysts. Detailed operation is summarized in Table 1 and FIG. 1.

Table 1 - Comparison of Residence Times Effects in Fischer-Tropsch Experimentation

Ref <sup>(A)</sup>	Catalyst	Conditions	Residence time	Conversion	CH <sub>4</sub> selectivity
1	Co/ZSM-5	240°C, 20-atm, H <sub>2</sub> /CO=2	3.6-sec	60 %	21 %
2	Co/MnO	220°C, 21-atm, H <sub>2</sub> /CO=2	0.72-sec	13 %	15 %
3	Co-Ru/TiO <sub>2</sub>	200°C, 20-atm, H <sub>2</sub> /CO=2	3-sec	61 %	5 %
	Co/TiO <sub>2</sub>	"	8-sec	49 %	7 %
4	Co/TiO <sub>2</sub>	200°C, 20-atm, H <sub>2</sub> /CO=2.1	2-sec	9.5 %	~9 %
		"	12-sec	72 %	~6 %
5	Ru/Al <sub>2</sub> O <sub>3</sub>	222°C, 21-atm, H <sub>2</sub> /CO=3	4.5-sec	20 %	?
		"	7.2-sec	36 %	
		"	8.4-sec	45 %	
		"	9.6-sec	51 %	
		"	12-sec	68 %	
		"	14-sec	84 %	
6	Ru/Al <sub>2</sub> O <sub>3</sub>	250°C, 22-atm, H <sub>2</sub> /CO=2	7.2-sec	38 %	5 %
7	Ru/Al <sub>2</sub> O <sub>3</sub>	225°C, 21-atm, H <sub>2</sub> /CO=2	12-sec	66 %	13 %
		222°C, 21-atm, H <sub>2</sub> /CO=3	12-sec	77 %	34 %

For references that contained results for multiple experimental conditions, the run which best matched our conversion, selectivity and/or conditions was chosen for comparison of residence time.

(A) References

1. Bessell, S., *Appl. Catal. A: Gen.* **96**, 253 (1993).
2. Hutchings, G.J., *Topics Catal.* **2**, 163 (1995).
3. Iglesia, E., S.L. Soled and R.A. Fiato (Exxon Res. and Eng. Co.), U.S. patent 4,738,948, Apr. 19, 1988.
4. Iglesia, E., S.C. Reyes, R.J. Madon and S.L. Soled, *Adv. Catal.* **39**, 221 (1993).
5. Karn, F.S., J.F. Shultz and R.B. Anderson, *Ind. Eng. Chem. Prod. Res. Dev.* **4**(4), 265 (1965).
6. King, F., E. Shutt and A.I. Thomson, *Platinum Metals Rev.* **29**(44), 146 (1985).
7. Shultz, J.F., F.S. Karn and R.B. Anderson, *Rep. Invest. - U.S. Bur. Mines* **6974**, 20 (1967).

Literature data (Table 1 and FIG. 1) were obtained at lower H<sub>2</sub>/CO ratio (2:1) and longer residence time (3 sec or longer). Low H<sub>2</sub>/CO (especially 2-2.5), long residence time, low temperature, and higher pressure favor Fischer-Tropsch synthesis. Selectivity to CH<sub>4</sub> can be significantly increased by increasing H<sub>2</sub>/CO ratio from 2 to 3. Increasing residence time also has a dramatic favorable effect on the catalyst performance. Although reference 3 in Table 1 shows satisfactory

results, the experiment was conducted under the conditions where Fischer-Tropsch synthesis is favored (at least 3sec residence time, and  $H_2/CO=2$ ). In addition, the experiment of reference 3 was done using a powdered catalyst on an experimental scale that would be impractical commercially because of the pressure drop penalty imposed by powdered catalyst. Operating at higher temperature will enhance the conversion, however at the much higher expense of selectivity to  $CH_4$ . It is also noteworthy that residence time in commercial Fischer-Tropsch units is at least 10 sec.

Hence, there is a need for a catalyst structure and method of Fischer-Tropsch synthesis that can achieve the same or higher conversion at shorter residence time, and/or at higher  $H_2/CO$ .

#### SUMMARY OF THE INVENTION

The present invention includes a catalyst structure and method of making the catalyst structure for Fischer-Tropsch synthesis that both rely upon the catalyst structure having a first porous structure with a first pore surface area and a first pore size of at least about  $0.1\ \mu m$ , preferably from about  $10\ \mu m$  to about  $300\ \mu m$ . A porous interfacial layer with a second pore surface area and a second pore size less than the first pore size is placed upon the first pore surface area. Finally, a Fischer-Tropsch catalyst selected from the group consisting of cobalt, ruthenium, iron, rhenium, osmium and combinations thereof is placed upon the second pore surface area.

Further improvement is achieved by using a microchannel reactor wherein the reaction chamber walls define a microchannel with the catalyst structure placed therein through which pass reactants. The walls may separate the reaction chamber from at least one cooling chamber.

The present invention also includes a method of Fischer-Tropsch synthesis having the steps of:

(a) providing a catalyst structure having a first porous structure with a first pore surface area and a first pore size of at least about 0.1  $\mu\text{m}$ ;

a porous interfacial layer with a second pore surface area and a second pore size less than the first pore size, the porous interfacial layer placed upon the first pore surface area;

a Fischer-Tropsch catalyst selected from the group consisting of cobalt, ruthenium, iron rhenium, osmium and combinations thereof placed upon the second pore surface area; and

(b) passing a feed stream having a mixture of hydrogen gas and carbon monoxide gas through the catalyst structure and heating the catalyst structure to at least 200  $^{\circ}\text{C}$  at an operating pressure, the feed stream having a residence time within the catalyst structure less than 5 seconds, thereby obtaining a product stream of at least 25% conversion of carbon monoxide, and at most 25% selectivity toward methane.

It is an object of the present invention to provide a catalyst structure for Fischer-Tropsch synthesis.

It is another object of the present invention to provide a method of Fischer-Tropsch synthesis having shorter residence time.

Advantages of the invention include (i) at residence time shorter than the prior art, higher conversions are achieved with no increase to methane selectivity; and (ii) as residence times increase, conversion increases and methane selectivity decreases (slightly). Surprisingly, the present invention represents an increase in conversion efficiency of at least a factor of 3 on the basis that equivalent conversion with conventional catalyst would require correspondingly greater residence time.

The subject matter of the present invention is particularly pointed out and distinctly claimed in the concluding portion of this specification. However, both the organization and method of operation, together with further advantages and objects thereof, may best be understood by reference to the following description



taken in connection with accompanying drawings wherein like reference characters refer to like elements.

## BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a graph of CO conversion versus residence time for prior art Fischer-Tropsch processes.

FIG. 2 is a cross section of a catalyst structure according to the present invention.

## DESCRIPTION OF THE PREFERRED EMBODIMENT(S)

The present invention is a catalyst structure and method of making the catalyst structure for Fischer-Tropsch synthesis which rely upon:

the catalyst is impregnated into a catalyst structure and calcined thereon. In a preferred embodiment, the catalyst structure is placed within a reaction chamber. The reaction chamber preferably has walls defining at least one microchannel through which pass reactants into the reaction chamber. The walls preferably separate the reaction chamber from at least one cooling chamber. A microchannel has a characteristic dimension less than about 1 mm.

In order to mitigate the mass transfer limitation of the catalyst structure, the catalyst impregnation forms a porous interfacial layer that is less than 50  $\mu\text{m}$ , preferably less than 20  $\mu\text{m}$ . Therefore, the diffusion path length is at least a factor of 5 shorter than for standard catalyst particles, and the catalyst structure is more active as indicated by the higher performance at shorter residence time. The thinner impregnated catalyst structure also enhances heat transfer, again due to the shorter heat transfer pathway, and leads to lower selectivity to  $\text{CH}_4$ .

In addition, because the catalyst structure is not required to be attrition resistant as would be with the catalyst particles used in a fluidized bed reactor, greater porosity may be used, for example porosity greater than about 30%. Thus mass transfer is enhanced in the catalyst structure.

The catalyst structure may be any geometric configuration including but not limited to foam, felt, wad and combinations thereof. Foam is a structure with continuous walls defining pores throughout the structure. Felt is a structure of fibers with interstitial spaces therebetween. Wad is a structure of tangled  
5 strands, like steel wool.

When the first porous structure is metal, its surface is passivated and coated with a ceramic layer using a chemical vapor deposition (CVD) method as described in U.S. patent application 09/123,781 (E-1666A) hereby incorporated by reference. The catalyst structure of the present invention is depicted in FIG. 1  
10 having a catalyst support **100** of a first porous structure, a buffer layer **102** (optional), an interfacial layer **104**, and, a catalyst or catalyst layer **106**. Any layer may be continuous or discontinuous as in the form of spots or dots, or in the form of a layer with gaps or holes. Continuous layer of buffer layer **102** is preferred.

15 The interfacial layer **104** is a metal oxide. The metal oxide includes but is not limited to  $\gamma$ -Al<sub>2</sub>O<sub>3</sub>, SiO<sub>2</sub>, ZrO<sub>2</sub>, TiO<sub>2</sub>, magnesium oxide, vanadium oxide, chromium oxide, manganese oxide, iron oxide, nickel oxide, cobalt oxide, copper oxide, zinc oxide, molybdenum oxide, tin oxide, calcium oxide, aluminum oxide, lanthanum series oxide(s), zeolite(s) and combinations thereof. Typically the  
20 porous support **100** has a thermal coefficient of expansion different from that of the interfacial layer **104**. Accordingly, for high temperature catalysis (T > 150 °C) a buffer layer **102** may be needed to transition between the two coefficients of thermal expansion. Another advantage of the buffer layer **102** is avoiding side reactions such as coking or cracking caused by a bare metal foam surface. For  
25 chemical reactions which do not require large surface area supports such as catalytic combustion, the buffer layer **102** stabilizes the catalyst metal due to strong metal to metal-oxide interaction. In chemical reactions which require large surface area supports, the buffer layer **102** provides stronger bonding to the high surface area interfacial layer **104**.

662484 APP.pwz  
08/17/99

The buffer layer **102** is a metal oxide that is  $\text{Al}_2\text{O}_3$ ,  $\text{TiO}_2$ ,  $\text{SiO}_2$ , and  $\text{ZrO}_2$  and combinations thereof. More specifically, the  $\text{Al}_2\text{O}_3$  is  $\alpha\text{-Al}_2\text{O}_3$ ,  $\gamma\text{-Al}_2\text{O}_3$  and combinations thereof. The structure of the  $\alpha\text{-Al}_2\text{O}_3$  is preferred since it is most resistant to oxygen diffusion. Therefore, it is expected that resistance against high temperature oxidation can be improved with alumina coated on the porous support **100**. When the porous support **100** is metal foam, for example a stainless steel foam, a preferred embodiment has a buffer layer **102** formed of two sub-layers (not shown). The first sublayer (in contact with the porous support **100**) is  $\text{TiO}_2$  for good adhesion and bonding of the ceramic layers to the porous support **100**. The second sublayer is  $\alpha\text{-Al}_2\text{O}_3$  which is used for passivating the metal foam and is placed upon the  $\text{TiO}_2$ .

Deposition of the buffer layer **102** may be by vapor deposition including but not limited to chemical vapor deposition, physical vapor deposition or combinations thereof. Because the vapor deposition is conducted at high temperatures, polycrystalline phases are formed providing good adhesion of the metal oxide to the metal foam surface. Alternatively, the buffer layer **102** may be obtained by solution coating. For example, the solution coating has the steps of metal surface functionalization via hydroxide formation, followed by surface hydrolysis of alkoxides to obtain the polycrystalline phases. This solution coating may be preferred as a lower cost method of depositing the buffer layer **102**. Polycrystalline metal oxides resist flaking of layers after several thermal cycles.

Because metal foam has web surfaces that are nonporous and smooth, deposition of the interfacial layer may be impeded. One way to mitigate this problem is to rough the metal foam surface via chemical etching. The adhesion of high surface area gamma-alumina supported metal catalysts to metal foam is significantly improved when metal foam is roughed via chemical etching using mineral acid solutions, for example HCl. Roughed web surface also shows improved resistance to the spalling of catalyst layer under thermal cyclings. The open cells of a metal foam may range from about 20 ppi (pores per inch) to about 1000 ppi and is preferably about 80 ppi.

Catalyst metals for Fischer-Tropsch synthesis include but are not limited to iron (Fe), cobalt (Co), ruthenium (Ru), rhenium (Re), osmium (Os) and combinations thereof.

The use of the catalyst impregnated metal foam permits residence time less than about 5 seconds, preferably from about 1 sec to about 2 sec. The reactor will scale up with modular reactors, which will provide at least a factor of 3 enhancement of equivalent activity.

According to the method of the present invention, residence time less than 5 seconds is achieved by: (a) providing a catalyst structure of a metal foam having a catalyst thereon; and (b) passing a feed stream having a mixture of hydrogen gas with carbon monoxide gas through the catalyst structure and heating the catalyst structure to at least 200 °C, thereby obtaining a product stream of at least 25% conversion of carbon monoxide, and at most 25% selectivity toward methane. In a preferred method, the catalyst structure includes a buffer layer and an interfacial layer with the catalyst impregnated onto the interfacial layer. The ratio of hydrogen to carbon monoxide ranges from about 1:1 to about 6:1, preferably from about 2:1 to about 3.5:1.

Residence time less than 5 seconds may be accomplished with standard equipment but at the expense of significant energy to raise the space velocity of the reactants to overcome the pressure drop and poorer heat transfer leading to higher methane formation. Heat transfer from the reaction chamber is preferably enhanced by addition of microchannels on at least one reaction chamber wall on the side of the reaction chamber wall opposite the catalyst structure.

It was unexpectedly discovered that by using the catalyst structure of the present invention, reducing the pressure of the Fischer-Tropsch reaction resulted in increased yield, less selectivity toward methane.

### Example 1

A reactor was constructed with a reaction chamber with an inlet and an outlet. Internal reactor chamber dimensions were length 35.6 mm (1.4 in), height 1.5 mm (0.060 in) and width 8mm (0.315 in).

- 5 Catalyst impregnated metal foam was made starting with a metal foam of stainless steel having a porosity of 90% as obtained from Astro Met, Cincinnati, Ohio. Foam metal surface was passivated and coated with a ceramic layer as described above.

- 10 15wt%Co1wt%Ru/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub> was synthesized in house using incipient wetness method. The powdered catalyst was ball-milled overnight and slurry dip-coated on foam metal until the desired loading was achieved. The coated catalyst was dried overnight and calcined at 350°C for four hours.

- 15 In this experiment, two catalyst materials were used with exactly the same composition but in different physical form. Both catalyst materials had 15wt%Co1wt%Ru/ $\gamma$ -Al<sub>2</sub>O<sub>3</sub>. One was in powder form tested in a micro fixed-bed reactor according to literature specification for minimizing the heat and mass transfer resistance. The other was a catalyst impregnated metal foam tested in a single channel testing unit.

- 20 Results are shown in Table E1-1. Even though both catalysts were tested under the identical conditions, powdered catalyst shows significantly higher conversion (99.6%) and higher selectivity to undesired product CH<sub>4</sub> (36%), apparently due to un-measured temperature excursions within catalyst bed.

TABLE E1-1 Fischer-Tropsch Catalyst Performance

Catalyst	Conditions	Residence time	Conversion	CH <sub>4</sub> selectivity
Co-Ru/Al <sub>2</sub> O <sub>3</sub> / foam	231°C, 23-atm, H <sub>2</sub> /CO=3	1-sec	17 %	9.6 %
"	247°C, 23-atm, H <sub>2</sub> /CO=3	1-sec	29 %	15 %
"	264°C, 23-atm, H <sub>2</sub> /CO=3	1-sec	50 %	22 %
"	264°C, 23-atm, H <sub>2</sub> /CO=3	1-sec	49 %	22 %
"	275°C, 23-atm, H <sub>2</sub> /CO=3	1-sec	69 %	24 %
"	275°C, 23-atm, H <sub>2</sub> /CO=3	2-sec	84 %	9.0 %
"	245 °C, 23 atm, H <sub>2</sub> /CO =3	1-sec	33%	12%
Co-Ru/Al <sub>2</sub> O <sub>3</sub> / powder	245 °C, 23 atm, H <sub>2</sub> /CO =3	1-sec	99.6%	36%

## 5 Example 2

An experiment was conducted to demonstrate operation at various pressures. The equipment was the same as in Example 1.

According to the literature, variation in pressure should only affect true residence time in Fischer-Tropsch synthesis. In other words, conventional wisdom in Fischer-Tropsch reactions is that reaction rate is proportional to pressure under identical gas hourly space velocity (GHSV).

However, as shown in Table E2-1, with the catalyst structure of the present invention, catalyst activity was unexpectedly enhanced as the pressure was decreased under the same temperature and pressure corrected residence time. This surprising result is attributed to the enhanced mass and heat transfer possible with the catalyst structure of the present invention.

Table E2-1 - Engineered catalyst performance for Fischer-Tropsch synthesis at 265°C under a temperature and pressure corrected residence time of 12.5 seconds.

Pressure, atm	Conversion, %	Selectivity to CH <sub>4</sub> , %
5	63	18
6	41	22
10	34	19
23	24	26

5

10 Example 3

Use of Co or Ru alone as a catalyst on the metal foam was also tested under the conditions of Example 1 and performance was confirmed worse than that of bimetallic catalyst such as Co-Ru.

15

CLOSURE

20

While a preferred embodiment of the present invention has been shown and described, it will be apparent to those skilled in the art that many changes and modifications may be made without departing from the invention in its broader aspects. The appended claims are therefore intended to cover all such changes and modifications as fall within the true spirit and scope of the invention.

## CLAIMS

5

We claim:

1. A catalyst structure for Fischer-Tropsch synthesis, comprising:  
said catalyst structure having a first porous structure with a first  
10 pore surface area and a first pore size of at least about 0.1  $\mu\text{m}$ ;  
a porous interfacial layer with a second pore surface area and a  
second pore size less than said first pore size, said porous interfacial layer  
placed upon said first pore surface area;  
a Fischer-Tropsch catalyst selected from the group consisting of  
15 cobalt, ruthenium, iron, rhenium, osmium and combinations thereof placed upon  
said second pore surface area.
2. The catalyst structure as recited in claim 1, wherein said porous  
structure has a geometry selected from the group of foam, felt, wad and  
20 combinations thereof.
3. The catalyst structure as recited in claim 1, wherein said porous  
structure is of a material selected from the group consisting of metal, ceramic  
and combinations thereof.
- 25 4. The catalyst structure as recited in claim 1, wherein said porous  
interfacial layer is selected from the group consisting of  $\gamma\text{-Al}_2\text{O}_3$ ,  $\text{SiO}_2$ ,  $\text{ZrO}_2$ ,  $\text{TiO}_2$ ,  
magnesium oxide, vanadium oxide, chromium oxide, manganese oxide, iron  
oxide, nickel oxide, cobalt oxide, copper oxide, zinc oxide, molybdenum oxide, tin  
30 oxide, calcium oxide, aluminum oxide, lanthanum series oxide(s), zeolite(s) and  
combinations thereof.



5. The catalyst structure as recited in claim 1, placed in a reaction chamber having walls defining a microchannel through which pass reactants.

5

6. The catalyst structure as recited in claim 5, wherein said walls separate said reaction chamber from at least one cooling chamber.

7. The catalyst structure as recited in claim 1, further comprising a buffer layer between said porous structure and said porous interfacial layer.

10

8. The catalyst structure as recited in claim 7, wherein said buffer layer is selected from the group consisting of  $\text{Al}_2\text{O}_3$ ,  $\text{TiO}_2$ ,  $\text{SiO}_2$ , and  $\text{ZrO}_2$  and combinations thereof.

15

9. The catalyst structure as recited in claim 7, wherein said buffer layer includes a sublayer of titania for adhering said gamma-alumina to said porous structure.

20

10. A method of Fischer-Tropsch reaction, comprising the steps of:

(a) providing a catalyst structure having a first porous structure with a first pore surface area and a first pore size of at least about  $0.1\ \mu\text{m}$ ;

a porous interfacial layer with a second pore surface area and a second pore size less than said first pore size, said porous interfacial layer placed upon said first pore surface area;

25

a Fischer-Tropsch catalyst selected from the group consisting of cobalt, ruthenium, iron, rhenium, osmium and combinations thereof placed upon said second pore surface area; and

(b) passing a feed stream having a mixture of hydrogen gas with carbon monoxide gas through said catalyst structure and heating said catalyst

30

structure to at least 200 °C at an operating pressure, said feed stream having a residence time within said catalyst structure less than 5 seconds, thereby obtaining a product stream of at least 25% conversion of carbon monoxide, and at most 25% selectivity toward methane.

5

11. The method as recited in claim 10, further comprising the step of reducing said operating pressure and decreasing selectivity toward methane.

12. The method as recited in claim 10, further comprising cooling said  
10 product stream.

13. The method as recited in claim 12, wherein said cooling is with a cooling chamber in thermal contact with said catalyst structure.

14. A method of making a Fischer-Tropsch catalyst structure,  
15 comprising the steps of:

providing a catalyst structure having a first porous structure with a first pore surface area and a first pore size of at least about 0.1  $\mu\text{m}$ ;

depositing a porous interfacial layer with a second pore surface  
20 area and a second pore size less than said first pore size, upon said first pore surface area;

placing a Fischer-Tropsch catalyst selected from the group consisting of cobalt, ruthenium, iron, rhenium, osmium and combinations thereof upon said second pore surface area.

25

15. A Fischer-Tropsch reactor having the Fischer-Tropsch catalyst structure recited in claim 14.

## ABSTRACT

5 The present invention includes a catalyst structure and method of making the catalyst structure for Fischer-Tropsch synthesis that both rely upon the catalyst structure having a first porous structure with a first pore surface area and a first pore size of at least about 0.1  $\mu\text{m}$ , preferably from about 10  $\mu\text{m}$  to about 300  $\mu\text{m}$ . A porous interfacial layer with a second pore surface area and a second pore  
10 size less than the first pore size is placed upon the first pore surface area. Finally, a Fischer-Tropsch catalyst selected from the group consisting of cobalt, ruthenium, iron and combinations thereof is placed upon the second pore surface area. Further improvement is achieved by using a microchannel reactor wherein the reaction chamber walls define a microchannel with the catalyst structure  
15 placed therein through which pass reactants. The walls may separate the reaction chamber from at least one cooling chamber. The present invention also includes a method of Fischer-Tropsch synthesis.

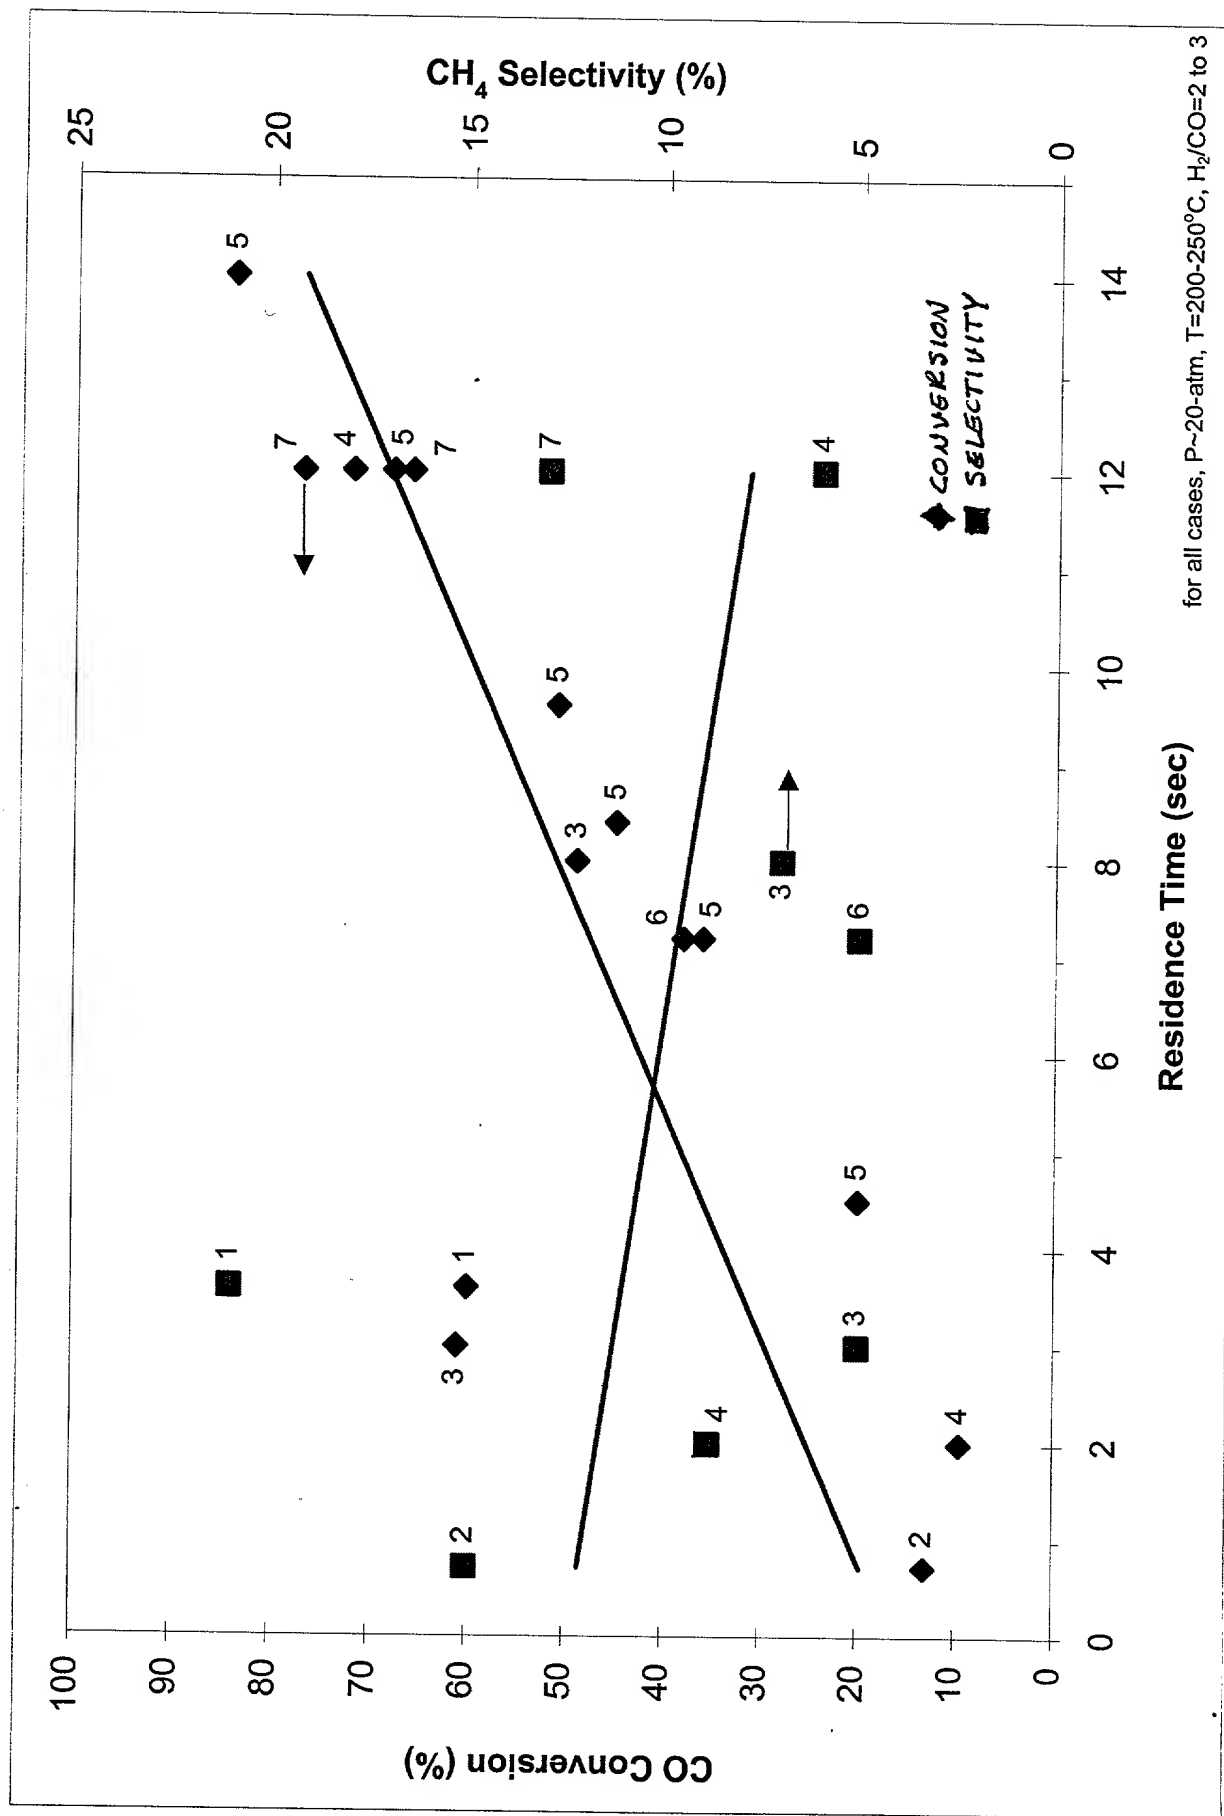
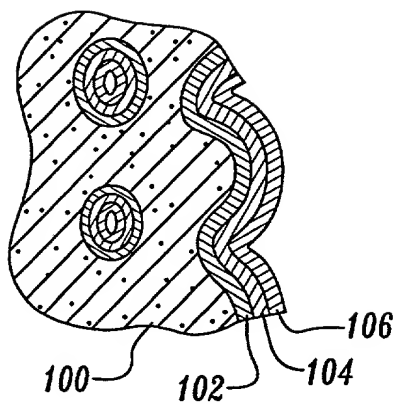


FIG. 1 (PRIOR ART)



*Fig. 2*